


AG/INDUSTRIAL 6 STUD, 6" BOLT CIRCLE, 4.62" PILOT

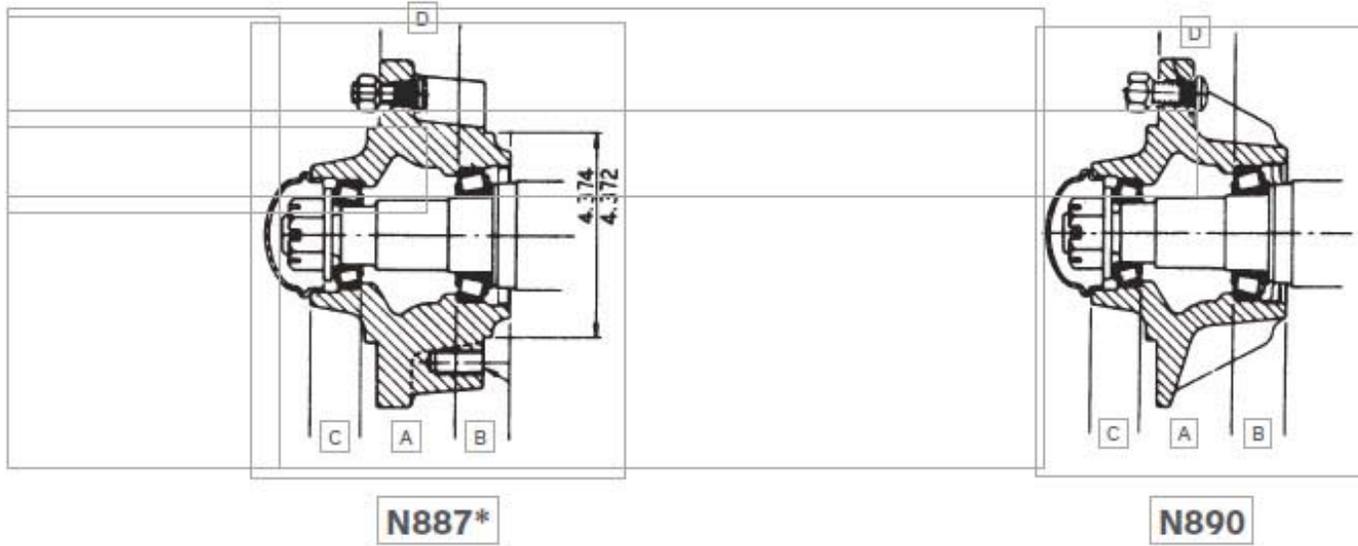


N887*

N890

MOD #	CAP. LBS.	HUB COMP.	HUB CUPS	INNER CUP	OUTER CUP	INNER CONE	BORE DIA.	OUTER CONE	BORE DIA.	HUB CAP.	STUD	NUT	SEAL	A	B	C	D
887B	4570	287880	287881	LM501310 910272	LM67010 910257	LM501349 910273	1.62	LM67048 910259	1.25	909905	913574	912927	906985	2.00	1.12	1.06	1.68
890	4570	287890	287891	LM501310 910272	LM67010 910257	LM501349 910273	1.62	LM67048 910259	1.25	909905	913574	912927	906985	2.00	1.31	1.06	1.62

• Hub capacity based on 1.12" Positive offset.

*Bolt pattern for brake on model 887 is 6 on 5.5 (1/2 - 20 Unf).

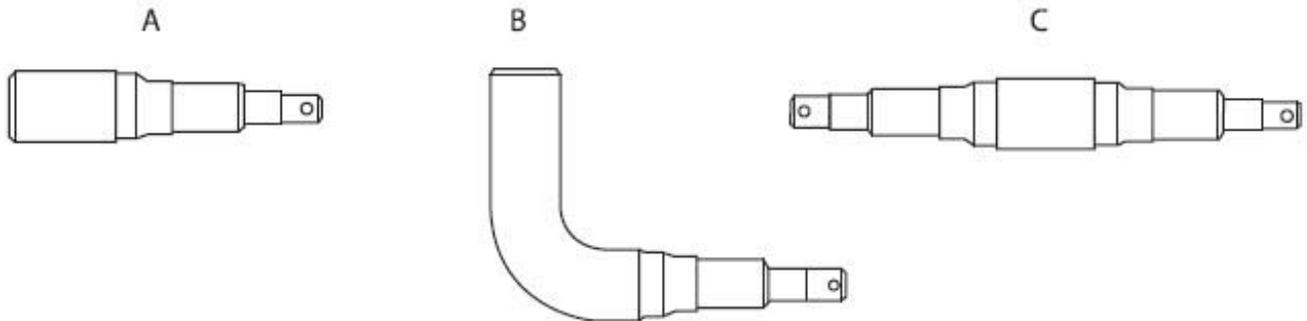

SPINDLE STYLE	FITS MOD #	MATL.	MATL DIA.	SPINDLE PKG NUMBER	SPINDLE ONLY NUMBER	WASHER NUMBER	NUT NUMBER	PIN NUMBER	OVERALL LENGTH	THREAD	SEAL DIA.
A	887	HRS	2 7/16	287320	287321	913607	912952	905936	15.500	7/8-14	2.25
A	890	HRS	2 7/16	287320	287321	913607	912952	905936	15.500	7/8-14	2.25